


# ROHS-COMPLIANT

L+T

LTR	REV.	DESCRIPTION	DATE
△*2	B	EGR # 071205-4 ADD LENGTH	12/05/07
△*2	C	EGR # 080509-7 EDIT PACKING,ADD BAR CODE	05/09/08

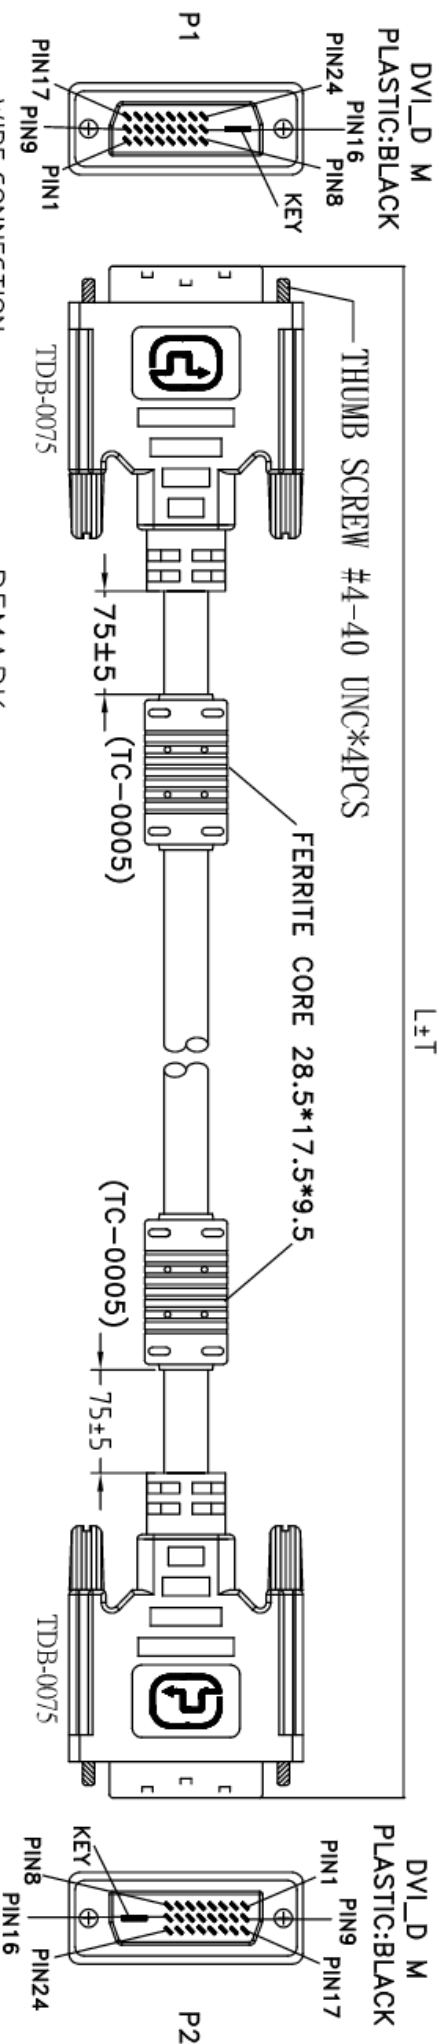

## REMARK:

1. CABLE:UL -20276 [28AWG(7/0.127)\*1P+DRAIN WIRE+AL/MY+MYLAR]\*7C+28AWG(7/0.127)\*1P+28AWG(7/0.127)\*3C+AL/MYLAR+BRAID SHIELDS(85%)T.C PVC JACKET, OD: 8.6±0.15mm, COLOR:BLACK(NK-K01).
- 2.CONNECTOR:  
P1&P2:DVI\_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.
- 3.SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE SHIELDING
- 4.HOOD:  
P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- 5.FERRITE CORE: (28.5\*17.5\*9.5) x 2
6. TEST REQUEST:
  - (1) 100% SHORT OPEN & MIS WIRE TEST.
  - (2) CONTACT RESISTANCE 3 OHMS MAX.
  - (3) INSULATION RESISTANCE 10M OHMS MIN.
  - (4) HI-POT VOLTAGE: 300V DC.
- 7.PACKING:EACH PC / POLY BAG + P/N LABEL



P1	WIRE COLOR	P2
1		1
2		2
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

200-0839-2	11.99.5598	15000	150	4	7611990175253
200-0839-1	11.04.5595	10000	100	10	7611990160938
DWG NO.	P / N	L (m/m)	T (m/m)	PCS/CTN	BAR CODE NO.

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw  
FANNIE 05/09/08

Title	
DVI_D - DVI_D DUAL LINK CABLE	
Customer P/N:	

**Rotronic Co., Ltd.**

Check	App'd	Customer	T-RNG
Engr	Scale NONE	Units	m/m
	Third Angle	Projection	Sheet 1/1
Dwg No.	200-0839	REV:C	