




## Delock Adapter Raspberry Pi GPIO Pin Header > Serial RS-232

### Description

This adapter by Delock enables you to connect a serial device via the 4 pin pin header connector (RX and TX) with the GPIO interface of your Raspberry Pi by using the included cable. Then configure your system according to the requirement.

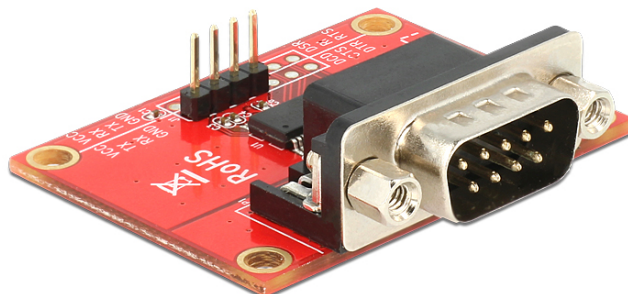

### Specification

- Connectors:
  - 1 x Sub-D 9 pin male RS-232
  - 1 x 4 pin pin header
- Supported baud rate up to 230 Kb/s
- Level shifter from RS-232 3.3 V to 5 V on Raspberry Pi
- Supported input voltage: 2.7 V ~ 5.25 V
- Dimensions (LxWxH): ca. 48 x 43 x 16 mm
- OS independent, no driver installation necessary

### System requirements

- A free pin header connector
- USB connection cables

### Package content

- Adapter
- Cable pin header 4 pin > 5 pin

### Item No. 65628

EAN: 4043619656288

Country of origin: Taiwan, Republic of China

Package: White Box



### Images

