

Delock WLAN 802.11 ac/a/b/g/n Antenna RP-SMA 2 dBi omnidirectional joint

Description

This WLAN antenna can be connected to wireless devices with RP-SMA connector in order to receive and send signals.



RP-SMA

Specification

- Connector: RP-SMA plug
- With flexible joint, rotatable
- Frequency range:
 - 2.400 ~ 2.500 GHz,
 - 5.150 ~ 5.875 GHz
- GAIN: 2 dBi
- Impedance: 50 Ohm
- VSWR: 2.0 max.
- Operating temperature: -10 °C ~ 55 °C
- Length with flexible joint: ca. 111.7 mm, without flexible joint ca. 83.4 mm
- Diameter:
 - ca. 7.8 mm (Ø peak)
 - ca. 10.0 mm (Ø SMA)

Item No. 88395

EAN: 4043619883950

Country of origin: Taiwan, Republic of China

Package: Poly bag


System requirements

- Device with free RP-SMA connector

Package content

- WLAN antenna RP-SMA with flexible joint

Images

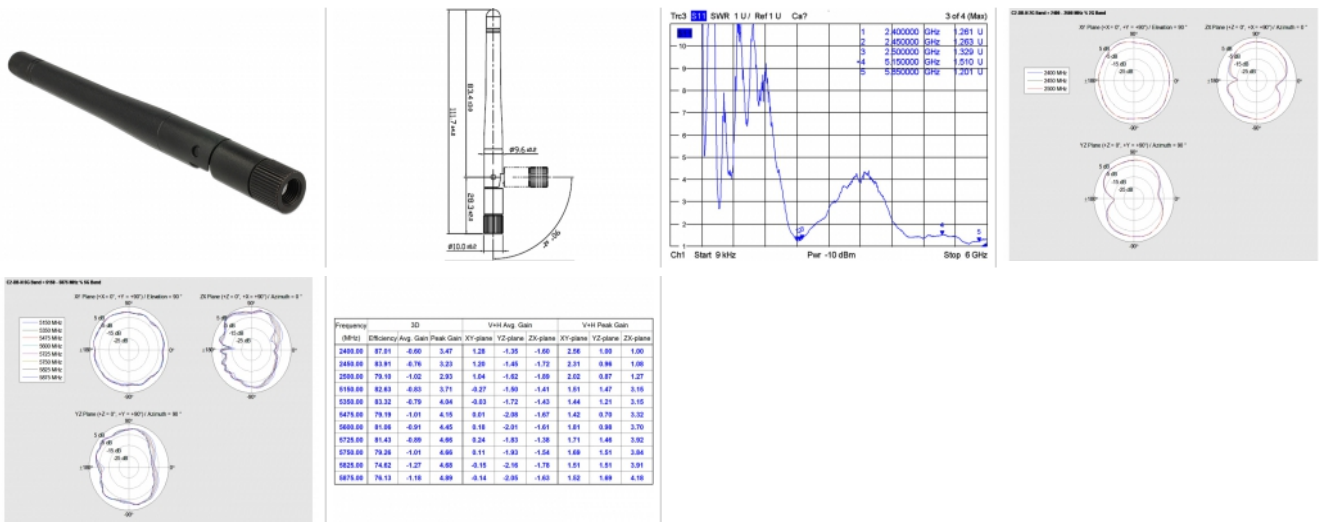

General

Suitable for indoor:	yes
Operating temperature:	-10 °C ~ 55 °C

Interface

Connection:	RP-SMA plug
-------------	-------------

Technical characteristics

Frequency range:	2.400 GHz - 2.500 GHz 5.150 GHz - 5.875 GHz
------------------	--

Gain:	2 dBi
-------	-------

Impedance:	50 Ohm
------------	--------

Polarisation:	linear vertical
---------------	-----------------

Power handling:	2 W
-----------------	-----

VSWR:	2
-------	---

Physical characteristics

Housing colour:	black
-----------------	-------

Diameter:	10.0 mm
-----------	---------

Length:	111.7 mm
---------	----------