Delock 2.5″ Converter SATA 22 pin > M.2 with Enclosure

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. It can be used as a replacement for a 2.5″ HDD. The converter will be installed into the system internally through a SATA 22 pin interface.

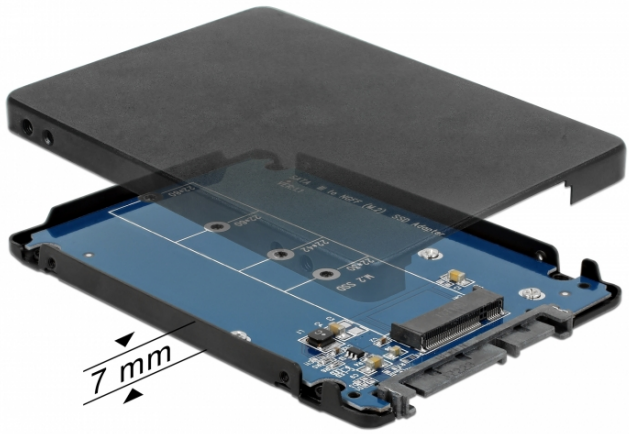

Specification

- Connectors:
  1 x SATA 6 Gb/s 22 pin plug >
  1 x 67 pin M.2 key B slot
- Interface: SATA
- Form factor: 2.5″
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- Bootable
- Dimensions (LxWxH): ca. 100 x 70 x 7 mm
- OS independent, no driver installation necessary

System requirements

- A free SATA 22 pin interface

Package content

- Converter
- Screw for M.2 module, screws for the enclosure
- Screwdriver
- User manual

Item no. 62688

EAN: 4043619626885

Country of origin: China

Package: Retail Box

Images



© 2019 by Delock . All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

© 2019 by Delock . All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.