


Delock 2.5" Converter SATA Express / U.2 > 1 x M.2 / 1 x mSATA with Enclosure 9.5 mm

Description

This Delock M.2 converter enables two different usage applications.

1. One M.2 PCIe SSD in 2280, 2260, 2242 and 2230 format can be connected and used as a replacement for a 2.5" HDD. The converter can be installed into the system internally through the U.2 68 pin interface.

2. One M.2 SATA SSD in 2280, 2260, 2242 and 2230 format and one mSATA SSD can be connected and used as a replacement for a 2.5" HDD. The converter can be installed into the system internally through the SATA Express interface.

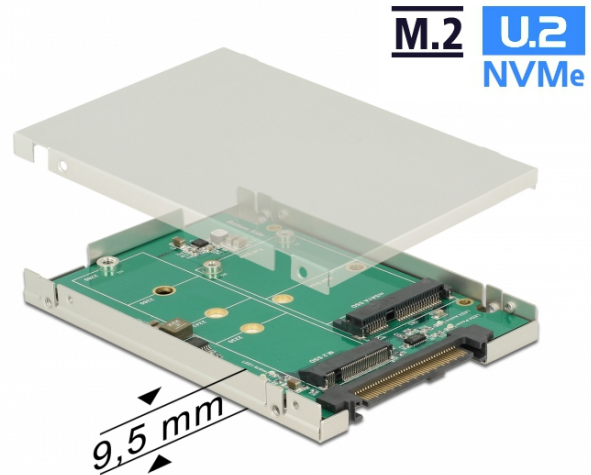

Specification

- Connector:
 - 1 x U.2 SFF-8639 / SATA Express male >
 - 1 x 67 pin M.2 key M slot
 - 1 x mSATA slot (half size / full size)
- Interface: PCIe / SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA or PCIe
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Supports NVM Express (NVMe) (only PCIe SSD)
- Maximum power for modules: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3 / Kernel 4.x.x
- A free SATA Express interface (for SATA M.2 and mSATA) or
- A free U.2 interface (for PCIe M.2) or
- A free SFF-8643 interface (for PCIe M.2)

Package content

- Converter
- 2.5" enclosure
- Fixing screws for M.2 and mSATA module, screws for enclosure
- User manual

Item no. 62786


EAN: 4043619627868

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
Form factor:	2.5"
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 or above ex Linux Kernel 4.x.x
Slot:	PCIe SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	Short circuit protection Overheating protection
Interface	
Connector 1:	1 x U.2 SFF-8639 / SATA Express male
Connector 2:	1 x 67 pin M.2 key M slot
connector 3:	1 x mSATA slot (half size / full size)
Physical characteristics	
Length:	100 mm
Width:	70 mm
Height:	9.5 mm